

THE RIGHT ANALYZER FOR YOUR APPLICATION!

ATEX II 3 G (Zone 2) WDG-IV UOP/RP OXYGEN ANALYZER FOR UOP CCR PLATFORMING PROCESS

SENSOR

Principle of Operation: Close-coupled nitrogen-aspirated oxygen analyzer using zirconium oxide for net oxygen measurement.

Output Range: From 0-1% to 0-100%

Accuracy: $\pm 0.75\%$ of measured value or $\pm 0.05\%$ oxygen, whichever is greater.

Response Time: 63% of a step change <12 secs.; 90% of a step change <16 secs.

Aspirator Requirements: 4.72 to 9.4 L/min at 0.35 kg/cm² above process pressure

Probe Length/Type:

27" / Hastelloy[®] C - standard. Other lengths available.

Max. Sample Dewpoint: 200°C

Sample Pressure: Max. 4.22 kg/cm²

Flow Switch: Integral flow sensor.

Purge Air: Max. 340 L/min. (Rapid Exchange Purge System)

Environment:

Ambient Temp.: -20°C to 60°C

Relative Humidity: 10% to 90%, non-condensing


Enclosure: NEMA 4X (IP56) hinged, stainless steel wall mount.

Calibration Gas Requirements:

Use calibration gases 3.16 kg/cm² or 0.35 kg/cm² above process pressure

O₂ Span Gas: Air

O₂ Zero Gas: 1% O₂, balance N₂

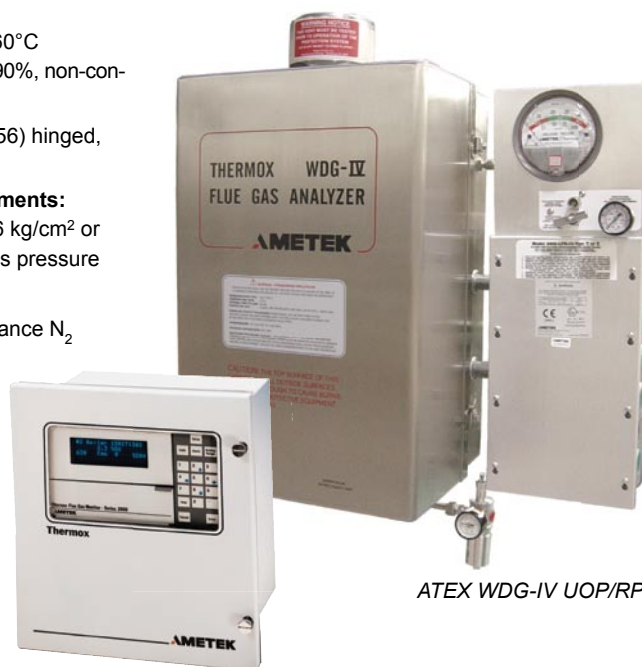

ATEX WDG-IV UOP/RP

Series 2000 Control Unit

SERIES 2000 CONTROL UNIT

Display: Four-line x 20-character vacuum fluorescent. Displays oxygen, time and date, sample flow, cell temperature, user-programmable text, thermocouple mV or cell mV. Password protection, programmable pressure compensation and context-sensitive help are also provided.

Analog Output: Two isolated linear current outputs. Select O₂, cell temperature, thermocouple mV or cell mV. Each output can be 4-20 mA, 0-20 mA, 20-4 mA or 20-0 mA and is fully scalable. Hold or track during calibration and select degree of damping. Maximum load 1200 ohms.

Alarms: Two independent oxygen alarms, each high or low selectable. One alarm can be allocated to % oxygen, calibrate or verify. Set relays to energize or de-energize on alarm. Flow alarm. Loss of purge alarm (on Sensor).

Contact Rating: 1A, 30V max. noninductive load, AC or DC. SPST type.

Diagnostics: Watchdog timer and service alarms. System test for A/D, RAM, EEPROM and keypad. Flow alarm. Display Line 4 reserved for full text error and diagnostic messages. Twenty-entry event log.

Communications: RS-485, 2-way addressable.

Environment:

Ambient Temp: -10°C to 50°C

Relative Humidity: 0% to 80%, non-condensing

Enclosure: Weatherproof NEMA 4 (IP56). NEMA 4X (IP56) stainless steel available as option.

Calibration: Oxygen cell lifetime extender. Calibrate or verify calibration. Store last calibration and verification data. Selectable calibration gas run time and process recovery time.

SYSTEM COMPLIANCE:

EMC Compliance: 89/336/EEC

Electronics Safety Compliance: 73/23/EEC

ATEX Directive 94/9/EC

TYPE APPROVAL (LCIE 05 ATEX 6140 X and LCIE 05 ATEX 6140 X / 01)



Series 2000 Control Unit Ex II 3 G EEx nA IIC T3 -10°C ≤ Ta ≤ 50°C

WDG... Ex II 3 G EEx nZ IIC T3 -20°C ≤ Ta ≤ 60°C


SENSOR

APPROX. WEIGHT: 75 LB (34 KG)

DIMENSIONS IN CENTIMETERS

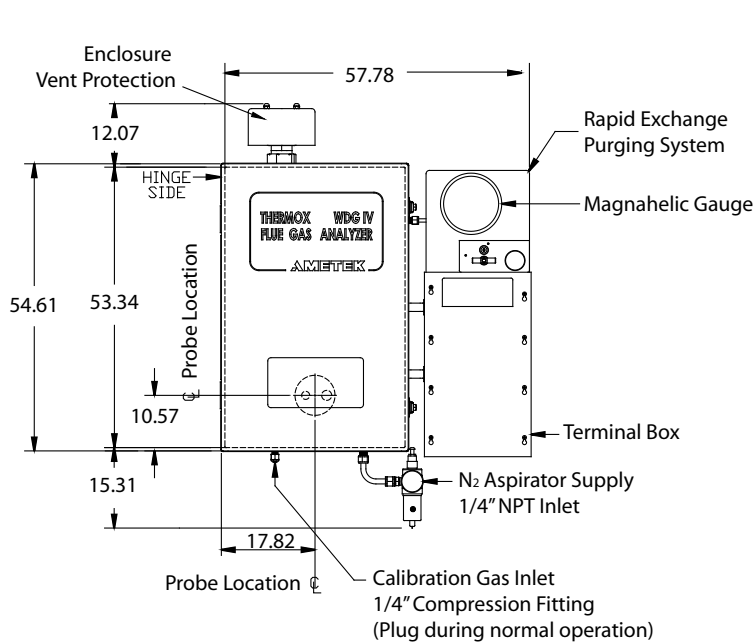


NOTE:
The 3\" nozzle shall be horizontal to 2\" above horizontal when the process line is at operating temperature. It must drain to process to avoid corrosive deposit build-up. Insulate nozzle per UOP spec.

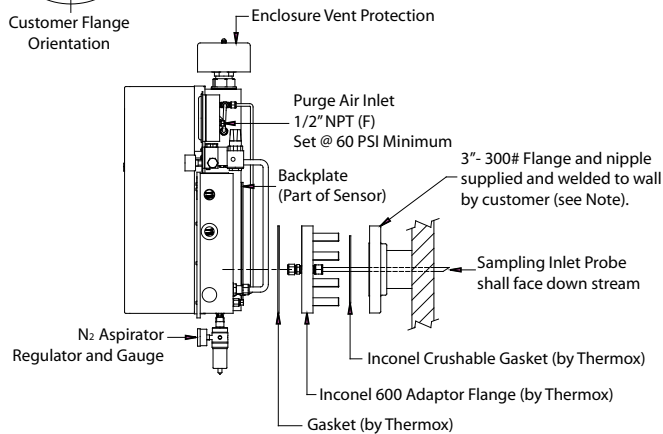

NOTES:


1. All static performance characteristics are with operating variables constant.
2. System accuracy referenced to 0.1 to 10% calibrated range.

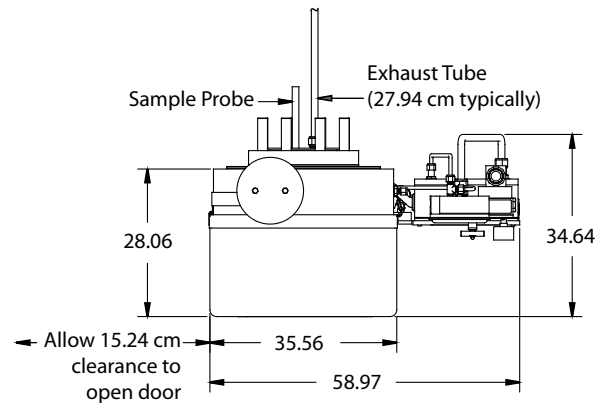

SERIES 2000 CONTROL UNIT

NEMA 4 / NEMA 4X (CUTOUT: 31.18 cm H X 27.31 cm W)

APPROX WEIGHT: 12.7 KG

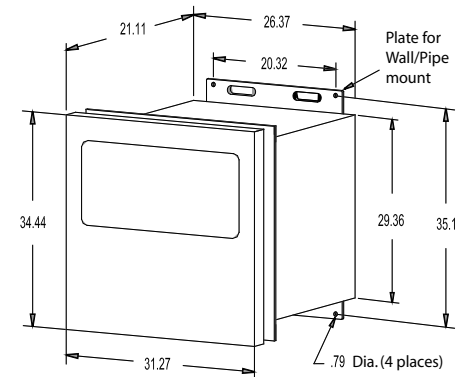

MODEL	POWER REQUIREMENTS
WDG UOP/RP	104-127 / 207-253 Vac, 700 / 1950 VA
Series 2000 Control Unit	104 - 253 Vac, 30 VA

One of a family of innovative process analyzer solutions from AMETEK Process Instruments. Specifications subject to change without notice.

USA - Pennsylvania
150 Freeport Road
Pittsburgh, PA 15238
Ph. 412-828-9040
Fax 412-826-0399

MANUFACTURING
LOCATIONS



CANADA
2876 Sunridge Way N.E.
Calgary, AB T1Y 7H9
Ph. 403-235-8400
Fax 403-248-3550

USA - Delaware
455 Corporate Blvd.
Newark, DE 19702
Ph. 302-456-4400
Fax 302-456-4444

USA - Oklahoma
2001 N. Indianwood Ave.
Broken Arrow, OK 74012
Ph. 918-250-7200
Fax 918-459-0165

AMETEK

Process Instruments
www.thermox.com

© 2006, by AMETEK, Inc. All rights reserved.
P720 (06/06 pdf)



SUPPORT LOCATIONS

USA - Texas • Ph. 281-463-2820 • Fax 281-463-2701
CHINA - Beijing • Ph. 86-10-85262111 • Fax 86-10-85262141
Chengdu • Ph. 86-28-86758111 • Fax 86-28-86758141
Shanghai • Ph. 86 21 6426 7049 • Fax 86 21 6426 7054
FRANCE • Ph. 33 1 30 68 89 00 • Fax 33 1 30 68 89 99
GERMANY • Ph. 49 21 59 91 36 0 • Fax 49 21 59 91 3680
MIDDLE EAST - Dubai • Ph. 971-4-881 2052 • Fax 971-4-881 2053
SINGAPORE • Ph. 65-6484-2388 • Fax 65-6481-6588